


05

COMPACT SURFACE



Corona 1
Corona 2
Corona 3
Corona 4
Corona 5
Corona 6
Corona 7
Corona 8
Corona 9
Corona 10

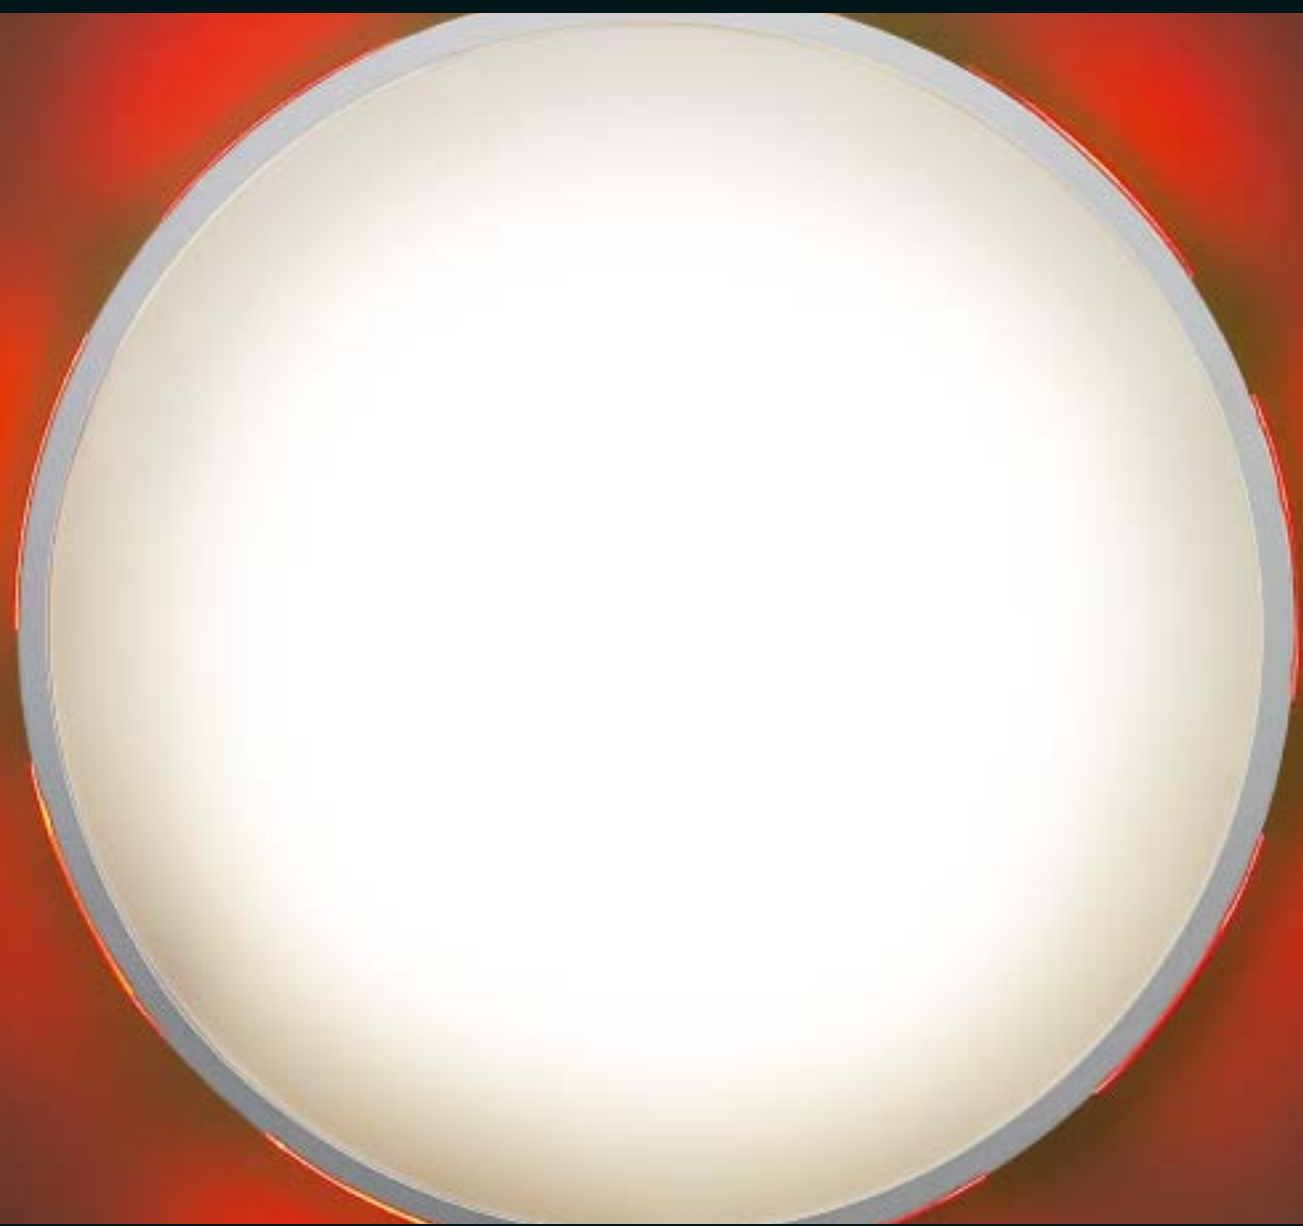


Corona 1

Surface Mounted IP54 Compact Fluorescent Luminaires

Superior quality luminaire with die-cast aluminium base and impact resistant opal or frosted polycarbonate cover.

- Suitable for interior and exterior use
- Complete with 3000k lamp(s)
- Switchstart or High Frequency control gear options
- Attractive spill light feature




Corona 1 with Opal Cover		Switchstart	High Frequency
Lamp	Body		
1x26W TC-D	White	ADO126	ADO126HF
2x26W TC-D	White	ADO226	ADO226HF
1x26W TC-D	Anthracite Black	ADO127	ADO127HF
2x26W TC-D	Anthracite Black	ADO227	ADO227HF
1x26W TC-D	Aluminium	ADO128	ADO128HF
2x26W TC-D	Aluminium	ADO228	ADO228HF

Corona 1 with Frosted Cover		Switchstart	High Frequency
Lamp	Body		
1x26W TC-D	White	ADF126	ADF126HF
2x26W TC-D	White	ADF226	ADF226HF
1x26W TC-D	Anthracite Black	ADF127	ADF127HF
2x26W TC-D	Anthracite Black	ADF227	ADF227HF
1x26W TC-D	Aluminium	ADF128	ADF128HF
2x26W TC-D	Aluminium	ADF228	ADF228HF

Options & Accessories


Emergency Lighting Version	Code
3 hour emergency version (pg 190)	Suffix /SC3

Corona 1 26W, 2x26W Opal Cover

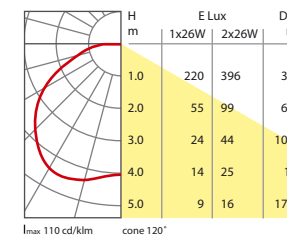

I_{max} 110 cd/klm cone 120°

Corona 1 26W, 2x26W Frosted Cover

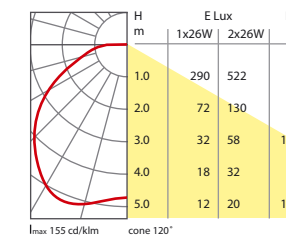

I_{max} 155 cd/klm cone 120°







Corona 2

Surface and Pendant Mounted Luminaire

Aluminium housing and trim with opal polycarbonate clip in cover for 28, 38 and 55W 2D lamps.

- High Frequency electronic control gear as standard
- Polycarbonate cover
- 3500K lamp included
- Attractive spill light feature

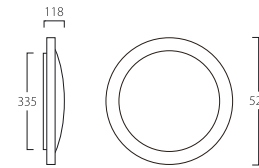

Lamp (Inc.)	White	Brass	Chrome	Steel
28W TC-DD	TLC28HF	TLC29HF	TLC30HF	TLC31HF
38W TC-DD	TLC38HF	TLC39HF	TLC40HF	TLC41HF
55W TC-DD	TLC55HF	TLC59HF	TLC60HF	TLC61HF

Options & Accessories

Emergency Lighting Version
3 hour maintained emergency version (pg 190)
The emergency module and batteries are fully integral. Suffix /SC3

Pendant Unit
Corona 2 with pendant mounting kit
Adjustable length (1.5m max) with 3 core cable. Suffix /PK

Semi-recessing Kit Suffix /RK

55W, 38W & 28W Opal Cover

H m	E Lux			Dia m
	55W	38W	28W	
1.0	548	401	315	2.9
2.0	137	100	79	5.7
3.0	60	45	35	8.5
4.0	34	25	20	11.4
5.0	22	16	13	14.3

I_{max} 145 cd/klm cone 110°







Corona 3

Surface and Pendant Mounted Luminaire

Aluminium housing and opal polycarbonate clip in cover for 28W and 38W 2D lamps.

- Choice of different coloured filters provide attractive halo effect
- High Frequency control gear as standard
- Polycarbonate cover
- 3500K lamp included

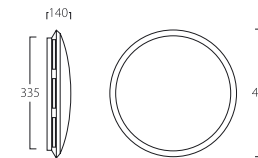

Lamp (Inc.)	White	Brass	Chrome
28W TC-DD	TLH28HF	TLH29HF	TLH30HF
38W TC-DD	TLH38HF	TLH39HF	TLH40HF

Options & Accessories	Code
Corona 3 Filters	
Blue	Suffix /B
Green	Suffix /G
Red	Suffix /R
Clear	Suffix /C

Emergency Lighting Version
3 hour emergency version (pg 190)
The emergency module and batteries are fully integral. Suffix /SC3

Pendant Unit
Corona 3 with pendant mounting kit
Adjustable length (1.5m max) with 3 core cable. Suffix /PK

Semi-recessing Kit Suffix /RK

38W & 28W

H m	E Lux		Dia m
	38W	28W	
1.0	401	315	3.4
2.0	100	79	6.9
3.0	45	35	10.4
4.0	25	20	14
5.0	16	13	17.3

I_{max} 145 cd/klm cone 110°





Corona 4

Surface and Pendant Mounted Luminaire

Aluminium housing and opal polycarbonate clip in cover for 28W and 38W 2D lamps.

- High Frequency control gear as standard
- Polycarbonate UV stabilised cover
- Available wattage: 1x28W, 1x38W TC-DD
- 3500K lamp included

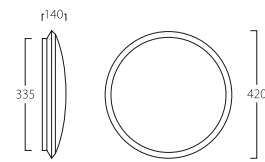

Lamp	White	Brass	Chrome
28W TC-DD	TLD28HF	TLD29HF	TLD30HF
38W TC-DD	TLD38HF	TLD39HF	TLD40HF

Options & Accessories

Emergency Lighting Version
3 hour emergency version (pg 190)
The emergency module and batteries are fully integral.

Suffix /SC3


Pendant Unit
Corona 4 with pendant mounting kit
Adjustable length (1.5m max) with 3 core cable.

Suffix /PK

Semi-recessing Kit

Suffix /RK

38W & 28W

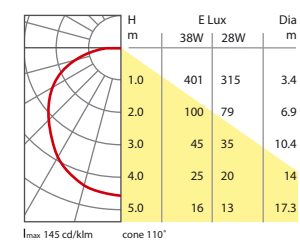


Corona 5 & 6

Surface Mounted Luminaires


Neat stylish and compact range of luminaires for general use in more discerning installations. Localised wall or ceiling lighting in banks, building societies, hotels, bars, porches etc.

- IP44 protection for use in bathrooms Zone 2
- Injection moulded polycarbonate with choice of snap on opal or prismatic cover
- Available in 3 trim finishes



Corona 5

- Supplied complete with 3500K lamp




White	High Frequency		Switchstart		
	Opal	Prismatic	Opal	Prismatic	
16W TC-DD	PDR517HF	PDX517HF	PDR517	PDX517	
28W TC-DD	PDR529HF	PDX529HF	PDR529	PDX529	
38W TC-DD	PDR539HF	PDX539HF	PDR539	PDX539	
Brass	Opal	Prismatic	Opal	Prismatic	
	16W TC-DD	PDR516HF	PDX516HF	PDR516	PDX516
	28W TC-DD	PDR528HF	PDX528HF	PDR528	PDX528
38W TC-DD	PDR538HF	PDX538HF	PDR538	PDX538	
Chrome	Opal	Prismatic	Opal	Prismatic	
	16W TC-DD	PDR518HF	PDX518HF	PDR518	PDX518
	28W TC-DD	PDR530HF	PDX530HF	PDR530	PDX530
38W TC-DD	PDR540HF	PDX540HF	PDR540	PDX540	

Emergency Lighting Version SC3 Suffix /SC3
 Maintained self-contained, 3-hour emergency versions available
 The emergency module and batteries are fully integral (pg 190).

Power Factor Correction Suffix /PF
 Available as an optional extra for all fluorescent versions

Corona 6

- Supplied complete with 3500K lamp




Trim	High Frequency		Switchstart	
	Opal	Prismatic	Opal	Prismatic
Chrome Trim	PDR718HF	PDX718HF	PDR718	PDX718
White Trim	PDR717HF	PDX717HF	PDR717	PDX717
Brass Trim	PDR716HF	PDX716HF	PDR716	PDX716


Emergency Lighting Version EM3 Suffix /EM3
 Maintained 3-hour emergency versions are supplied with the emergency module and batteries in a separate steel enclosure connected to the luminaire via 0.5m flexible conduit wiring harness.

Power Factor Correction Suffix /PF
 Available as an optional extra for all fluorescent versions

Corona 5 38W, 28W & 16W Opal Cover

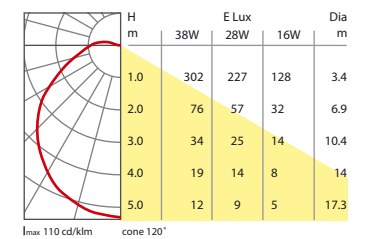

Corona 6 38W, 28W & 16W Prismatic Cover

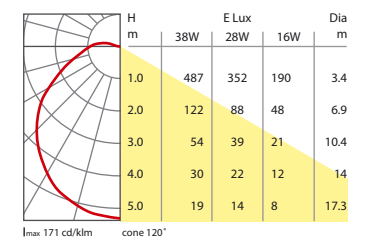




Corona 7 & 8


Surface Mounted Luminaires

Slim, versatile, compact fluorescent luminaires excellent in corridors, waiting and changing rooms, porches, toilets, bars etc.

- IP44 protection for use in bathrooms Zone 2
- Injection moulded white base in polycarbonate with snap on opal or clear prismatic covers
- Supplied complete with energy saving 3500K TC-DD lamp



Corona 7




Lamp	High Frequency		Switchstart	
	Opal	Prismatic	Opal	Prismatic
16W TC-DD	PDR417HF	PDX417HF	PDR417	PDX417
28W TC-DD	PDR429HF	PDX429HF	PDR429	PDX429
38W TC-DD	PDR439HF	PDX439HF	PDR439	PDX439

Options

Emergency Lighting Version Suffix /SC3
 Maintained self-contained, 3-hour emergency versions available
 The emergency module and batteries are fully integral.

Power Factor Correction Suffix /PF
 Available as an optional extra for switchstart versions

Corona 8




Lamp	High Frequency		Switchstart	
	Opal	Prismatic	Opal	Prismatic
16W TC-DD	PDR617HF	PDX617HF	PDR617	PDX617

Options


Emergency Lighting Version EM3 Suffix /EM3
 Maintained 3-hour emergency versions are supplied with the emergency module and batteries in a separate steel enclosure connected to the luminaire via 0.5m flexible conduit wiring harness.

Power Factor Correction Suffix /PF
 Available as an optional extra for switchstart versions

Corona 7 38W, 28W & 16W
Opal Cover

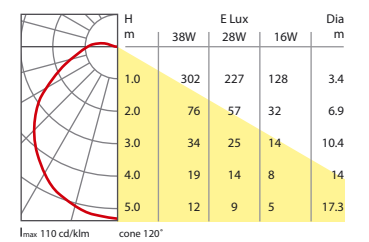

Corona 8 38W, 28W & 16W
Prismatic Cover

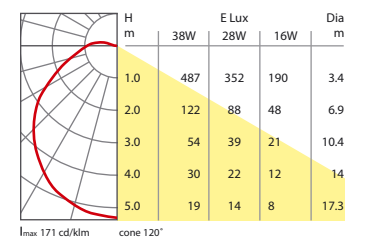




Corona 9 & 10


Surface Mounted Luminaires

Injection moulded polycarbonate surface mounted luminaire.
Wall or ceiling mounting in porches, corridors, stairs, landings etc.



Corona 9

- B22d lamp holder for 100W (max) GLS lamp or 20W (max) integrated compact fluorescent lamp
- Black polycarbonate body with white opal polycarbonate cover




Code

PDS100

Corona 10

- B22d lampholder for 75W (max) GLS lamp or 20W (max) integrated compact fluorescent lamp
- Black polycarbonate body with white opal polycarbonate cover



Code

PDB100

