

09

SPECIAL  
AREA  
LUMINAIRES



Argo 1  
Argo 2  
Argo 3




## Argo 1

### High Specification Halogen Wall/Mirror Lights with Integral Occupancy Detection Sensor


For contemporary bathrooms, halls or corridors in hotels and residences.

- IP44 rating makes Argo 1 suitable for use in bathroom Zones 2 & 3
- The high frequency, occupancy detection sensor is adjustable to cover a 0.5 to 5m diameter zone.
- Controllable operational light level and 'time on' period
- Light and sensor installed with single connection for rapid installation
- Opal glass cover with stainless steel end caps
- Argo 1 includes 40W G9 Halogen lamps



Lamps (Included)	Length	Code
3x40W G9	500mm	SH348
2x40W G9	350mm	SH248

#### Detection Zone for Wallmounting

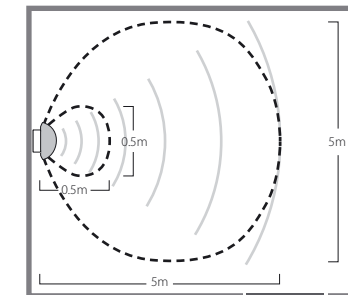





## Argo 2

### Surface Mounted 55W TC-L Luminaire

Ideal for leisure centres and multi purpose sports halls. High output compact fluorescent lamps provide a flexible alternative to HID sources.

- Instant start, flicker free white light
- Excellent colour rendition
- Multi lamp switching options
- Daylight linking, dimming and occupancy sensing available through digital control
- Rugged zintec steel construction with welded steel mesh guard

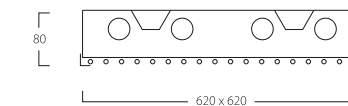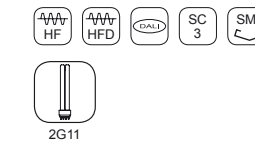

Lamp (Not Inc.)	Code
4x40W TC-L	SE455
6x55W TC-L	SE655

#### Options & Accessories


**Emergency Lighting Version**  
3 hour emergency version (pg 190)  
The emergency module and batteries are fully integral. Code  
Suffix /SC3

**Lighting Controls For Energy Saving**  
Available fitted with digital dimming ballasts for simple switch dimming or more sophisticated remote control, presence detection and daylight linking. Refer to page 188 for details.

Switch-dimming version Suffix /HFD  
DALI protocol control Suffix /DALI

'With Lamp' Option Available to special order

#### 4x55W and 6x55W TC-L

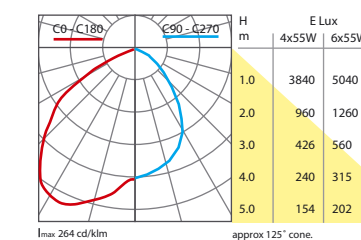





## Argo 3

### IP65 T5 Fluorescent Batten

Developed for use with TL5 lamp technology, suitable for where a dust and jet proof luminaire is required. Ideal for the food industry, factories, plant rooms and car parks.

- Slim, modern design with all UV stabilised polycarbonate construction
- Silicone one piece gasket
- High Frequency electronic control gear as standard
- Powder coated, steel gear tray with quick release and stainless steel catches for easy maintenance
- Supplied complete with waterproof 20mm cable glands, optional suspension plates and spare clips
- Clear polycarbonate diffuser with moulded prisms for maximum light output and controlled distribution

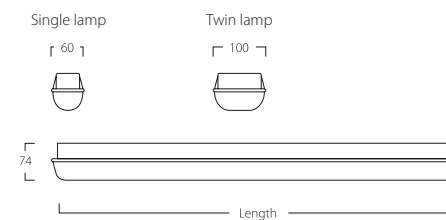

Single lamp (Not Inc.)	Length x Width	Code
1x28W HE T5	1210mm x 60mm	SX128
1x35W HE T5	1510mm x 60mm	SX135
1x49W HO T5	1510mm x 60mm	SX149

Twin lamp (Not Inc.)	Length x Width	Code
2x28W HE T5	1210mm x 100mm	SX228
2x35W HE T5	1510mm x 100mm	SX235
2x49W HO T5	1510mm x 100mm	SX249

#### Options & Accessories Code

##### Emergency Lighting Version

Maintained, self-contained 3 hour versions are available with integral module and batteries in twin body versions with single lamp only.

Single lamp	Length x Width	Code
1x28W HE T5	1210mm x 100mm	SX128/SC3
1x35W HE T5	1510mm x 100mm	SX135/SC3

'With Lamp' Option Available to special order

##### 2x35W and 2x28W HE T5

