


LED 4

Slimline bulkhead fitting with LED opal diffuser.
 Available with side conduit entry.

FEATURES

- Spun aluminium housing
- Available with integral controls
- LED optimised diffuser material
- Integral emergency options
- Side conduit entry available

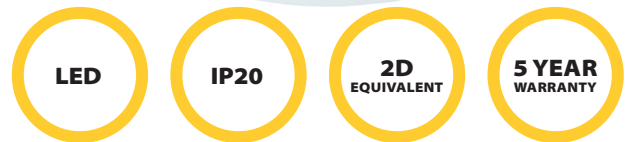

TECHNICAL DETAILS

Part Number	Description	Replaces	Weight (kg)	No. Per 10A Breaker	Inrush Current (A)	Circuit Watts (W)	Board Lumens	Luminaire Lumens	LI/cW
L4L32504K-HE	White Body	16W 2D	2	100	8A 80µs	6	1041	780	130.1
L4L32704K-HE	White Body	28W 2D	2	65	8A 80µs	10	1734	1301	130.1

OPTIONS AND ACCESSORIES

- EM** Integral Emergency (1W)
- EMST** Integral Emergency Self Test (1W)
- CF** Corridor Function
- MWP** Remotely Programmable Microwave SwitchDIM/DALI
- WLEM** Wireless Monitored Emergency
- 3K** 3000K Colour Temperature
- 5K** 5000K Colour Temperature

PHOTOMETRIC AND DIMENSION

