

# MICROPRISM




- LED
- IP20
- T5  
EQUIVALENT
- 5  
YEAR  
WARRANTY

Feature luminaire for office ceilings. Graded light output to side panels. 65° cut-off central diffuser section.

## FEATURES

- Attractive alternative to panels
- UGR 19 as standard
- Integral sensors and controls available
- Integral emergency and self-test options
- Suitable for T grid ceilings
- Surface version available

## LED CHARACTERISTICS

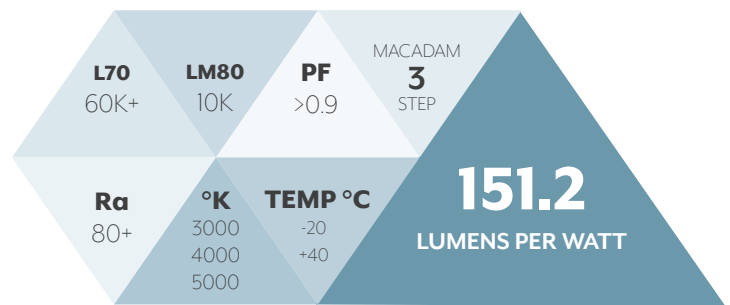


## TECHNICAL DETAIL

Part Number	Description	Replaces	Weight (kg)	No. Per 10A Breaker	Inrush Current (A)	Circuit Watts (W)	Board Lumens	Luminaire Lumens	LI/cW
PRISM-27-LED-4K	27W 600 x 600 Lay-in Indirect Panel	1 x 55W PL	4.60	50	5A 36µs	27	4083	3062	113.4
PRISM-40-LED-4K	40W 600 x 600 Lay-in Indirect Panel	2 x 40W PL	4.60	35	5A 50µs	40	5925	4446	111.1


## OPTIONS AND ACCESSORIES

- EM** Integral Emergency (1 Watt)
- EMST** Integral Emergency Self Test (1 Watt)
- CF** Corridor Function
- MW** Microwave Sensor
- MWP** Remote Programmable Microwave SwitchDIM/DALI
- DD** Wireless Control System
- WL** 3000K Colour Temperature
- 3K** 5000K Colour Temperature
- 5K**

## DIMENSIONS

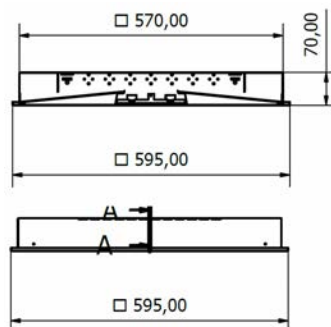

## PHOTOMETRIC



# MICROPRISM KEY FEATURES

