

# REGORLED6



- LED
- IP65
- HQI  
EQUIVALENT
- 5  
YEAR  
WARRANTY

High quality LED floodlight constructed from polycarbonate and stainless steel. Non-corrosive construction is ideal for coastal areas.


## FEATURES

- Tough polycarbonate UV resistant housing
- Tridonic constant current control gear
- Stainless steel bracket
- Excellent passive thermal control
- Stainless steel and polycarbonate
- Different colour LEDs available on request
- Blue LED option available

## TECHNICAL DETAIL

Part Number	Description	Replaces	Weight (kg)	No. Per 10A Breaker	Inrush Current (A)	Circuit Watts (W)	Board Lumens	Luminaire Lumens	LI/cW
R6L304K	30W LED Flood	70W SON	7.72	50	8A 100µs	20	3966	3570	119.0
R6L454K	45W LED Flood	80W MBF	7.72	20	12A 50µs	30	5950	5355	119.0
R6L604K	60W LED Flood	100W HQI	7.72	20	12A 50µs	60	7933	7140	119.0


## LED CHARACTERISTICS

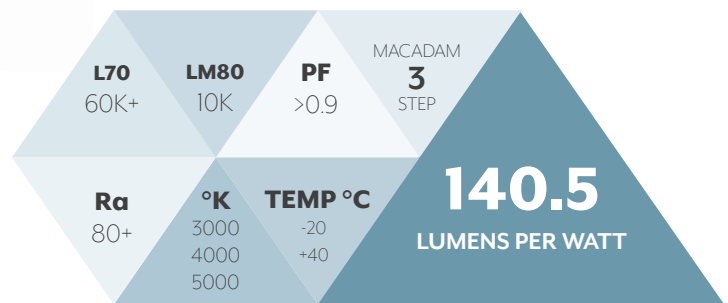

## OPTIONS AND ACCESSORIES

- PC Integral Photocell
- 3K 3000K Colour Temperature
- 5K 5000K Colour Temperature

## DIMENSIONS

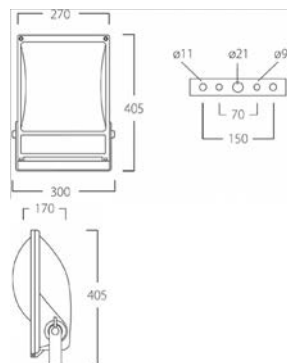

## PHOTOMETRIC

