


INDUSTR

STARLUX LED

LED aisle racking and high bay luminaire. The energy efficient, high performance LED luminaire for warehouse and factory applications.

FEATURES

- 10 ° option available for wide aisles
- Integral control options available
- IP65 version available
- Universal mounting bracket for surface and conduit mounting available
- Range of lumen outputs available

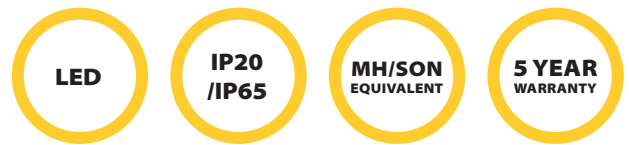

TECHNICAL DETAILS

Part Number	Description	Replaces	5.7Weight (kg)	No. Per 10A Breaker	Inrush Current (A)	Circuit Watts	Board Lumens	Luminaire Lumens	3LJ/cW
STA-95-A-4K	95W Aisle Racking Luminaire	150W SON/MH	4.8	4	57A 230μs	95	13526	12769	134.4
STA-160-A-4K	160W Aisle Racking Luminaire	250W SON/MH	5.7	7	50A 176μs	160	22781	21505	134.4
STA-190-A-4K	190W Aisle Racking Luminaire	400W SON/MH	5.9	6	114A 217μs	190	27052	25537	134.4
STA-95-HB-4K	95W High Bay Luminaire	150W SON/MH	4.8	4	57A 230μs	95	13526	12769	134.4
STA-160-HB-4K	160W High Bay Luminaire	250W SON/MH	5.7	7	50A 176μs	160	22781	21505	134.4
STA-190-HB-4K	190W High Bay Luminaire	400W SON/MH	5.9	6	114A 217μs	190	27052	25537	134.4



10° Wide Aisle Version



KEY FEATURES



OPTIONS AND ACCESSORIES

EM	Integral Emergency (4W)
EMST	Integral Emergency Self Test (4W)
CF	Corridor Function
MWH	Remote Programmable Microwave
DD	SwitchDIM/DALI
WL	Wireless Control System
WLEM	Wireless Monitored Emergency
PIR	Programmable PIR
PIRW	Long Range PIR
IP65	IP65 Version (Raw Stainless Steel)
BKT	Surface/Trunking Mounting Bracket
WA	10° Wide Aisle Option
3K	3000K Colour Temperature
5K	5000K Colour Temperature

PHOTOMETRIC AND DIMENSION

